

BOL SERIES

Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

BOL-44-R-L-C-MCTP-BR

44" Round Bollard



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

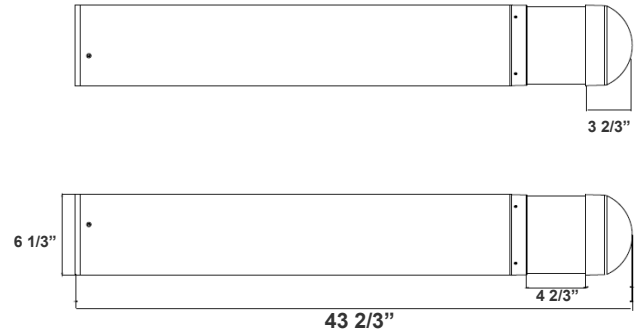

43 2/3"(W) x 6 1/3"(H)

Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

Features

- Corrosion Resistant Aluminum for Exterior
- Samsung 2835 LED Chips
- Wattage & CCT Selectable Switches inside fixture
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277VAC
- Wattage: 12W-16W-22W
- Power Factor: >0.9
- Efficacy: 68 LPW

Lighting:

- Wattage & CCT Selectable Switches inside fixture
- Lumens: 1540LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle : 360°
- Lifespan: 70000 Hours

Mechanical:

- Flat Top with Cone Reflector & Frosted Lens
- Corrosion Resistant Aluminum for Exterior
- Mounting Accessories & Anchor Bolts Included (7-1/2" long)
- Operating Temperature: -40°F to 113°F
- 7 Years Warranty
- IP Rating: IP65, Wet Locations

Applications:

- Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

Other Models:

- 22W | 1500LM | BOL-44-R-L-C-MCTP-BK




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-ZY-29-2Z

Photometrics: BOL-44-R-L-C-MCTP-BR

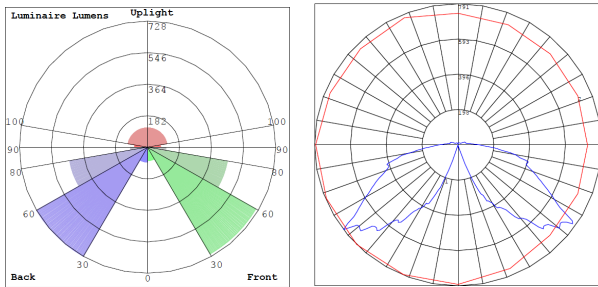

BUD Rating: B1-U3-G2

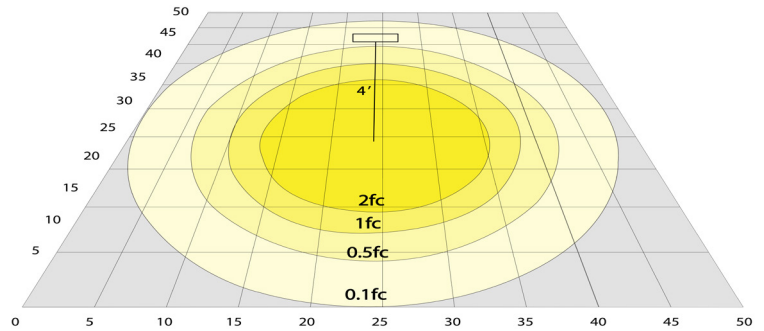

Area 50'x 50' Mounting Height: 9'

Other Views:




Lens View



Bottom View



Mounting accessories
Included



Mounting Template
3.98" H x 3.44" W x 0.125" D

Performance Table: BOL-44-R-L-C-MCTP-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
BOL-44-R-L-C-MCTP-BR	12W	120~277V	1560LM	3000K 4000K 5000K	B1-U3-G2	130
			1680LM			
			1620LM			
	16W		2080LM			
			2240LM			
			2160LM			
			2860LM			
	22W		3020LM			
			2970LM			

Sample Ordering

Model Height Top Shape Reflector Lens Type Watt/Color Temp. Housing

BOL - 44 - R - L - C - MCTP - BR

Example:

1. BOL-44-R-L-C-MCTP-BR

(FOR BOL 22W MCTP FIXTURE 120-277V)

