



CRE-10-30K-BR
CRE-10-40K-BR
CRE-10-50K-BR

CRE-10-30K-SIL
CRE-10-40K-SIL
CRE-10-50K-SIL

CREST BY WESTGATE LED WALL SCONCES

Ideal for general site lighting, residential houses, doorway.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277ACV
- Wattage: 10W(2.5W X 4)
- Power Factor: 0.95
- Efficacy: 90LM/W

HOUSING SPECIFICATIONS:


- Patent-Pending design with separate light engine (base) and interchangeable designer trims expand the series to multiple color temperatures and models.
- Series can be stocked as separate engines and trims to offer a versatile collection at the store level
- Die-cast Aluminum weatherproof housing, steel backplate, Aluminum Trim (Dark Bronze or Silver)
- Operating temperature: -40°F to 107°F
- Lifespan: 50,000 hr.
- IP Rating: IP65, Suitable for wet locations

CERTIFICATIONS:



DIMENSIONS:

20"(L) x 5.4"(W) x 3.7"(D)

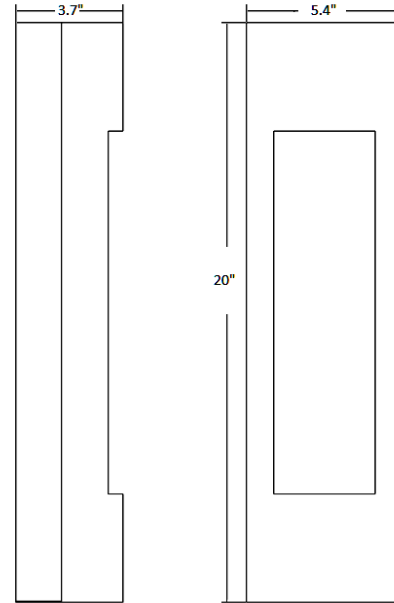

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CRE-10-30K-BR	10W(2.5W X 4)	100~277ACV	900LM	3000K
CRE-10-40K-BR	10W(2.5W X 4)	100~277ACV	900LM	4000K
CRE-10-50K-BR	10W(2.5W X 4)	100~277ACV	900LM	5000k
CRE-10-30K-SIL	10W(2.5W X 4)	100~277ACV	900LM	3000K
CRE-10-40K-SIL	10W(2.5W X 4)	100~277ACV	900LM	4000K
CRE-10-50K-SIL	10W(2.5W X 4)	100~277ACV	900LM	5000k

LIGHTING SPECIFICATIONS:

- LED: Philips Lumileds LEDs
- Total lumens: 900LM
- Color temperature: 3000K/4000k/5000k
- Color rendering index: >70

WARRANTY: 7 years




CRE-10-30K-BR **CRE-10-30K-SIL**
CRE-10-40K-BR **CRE-10-40K-SIL**
CRE-10-50K-BR **CRE-10-50K-SIL**

CREST BY WESTGATE LED WALL SCONCES


PHOTOMETRICS CHART :

Luminous Intensity Distribution Curve

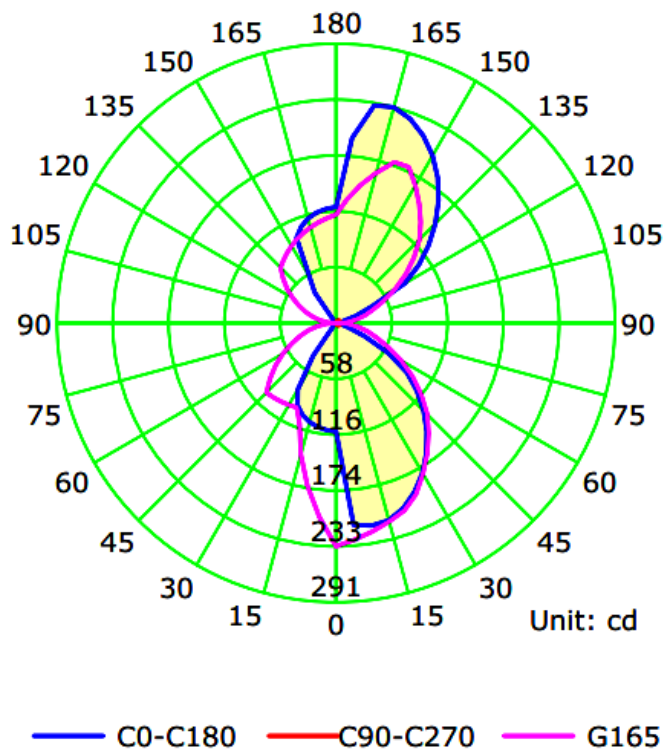

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CRE-10-30K-BR	10W(2.5W X 4)	100~277ACV	900LM	3000K
CRE-10-40K-BR	10W(2.5W X 4)	100~277ACV	900LM	4000K
CRE-10-50K-BR	10W(2.5W X 4)	100~277ACV	900LM	5000k
CRE-10-30K-SIL	10W(2.5W X 4)	100~277ACV	900LM	3000K
CRE-10-40K-SIL	10W(2.5W X 4)	100~277ACV	900LM	4000K
CRE-10-50K-SIL	10W(2.5W X 4)	100~277ACV	900LM	5000k


The Average Illuminance Effective Figure

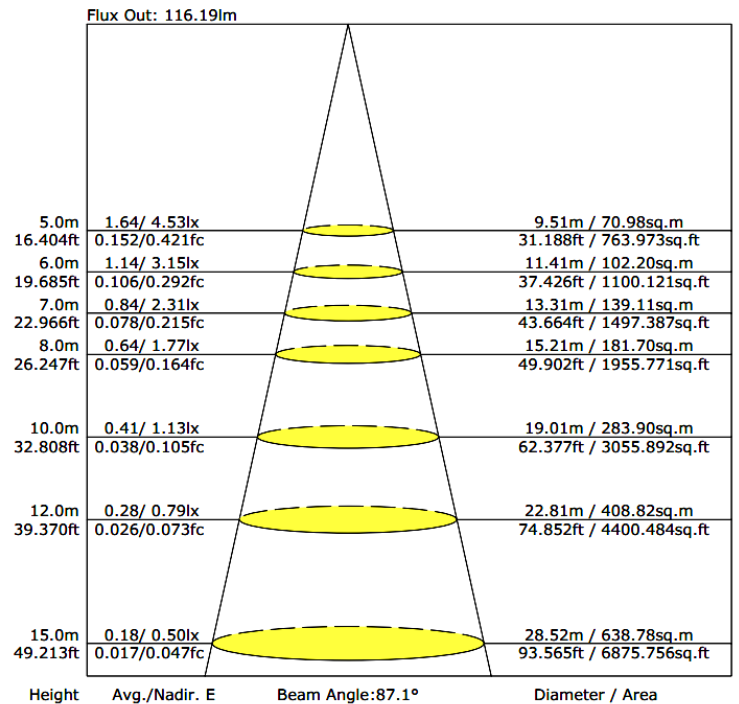

CREST BY WESTGATE LED WALL SCONCES

OPTIONAL TRIMS:

ALL MODELS PROVIDE UP/DOWN LIGHT

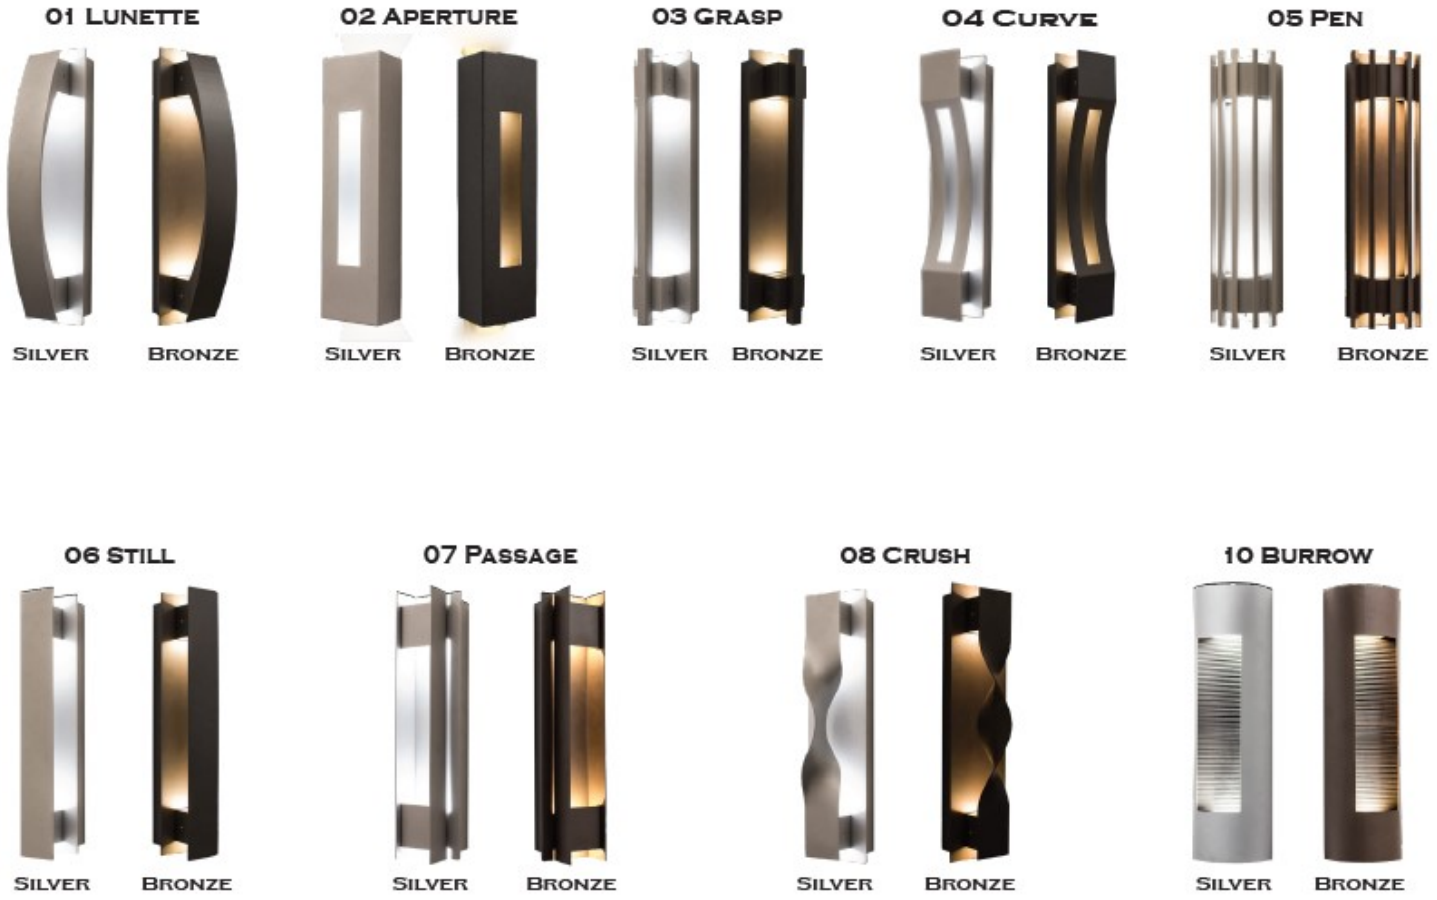

CATALOG NO.		TRIM		COLOR TEMPERATURE		FINISH	
		CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	DESCRIPTION
CRE	10W (900LM)	01	Lunette	30K	3000K	BR	Bronze
CRE-HL20	20W (1800LM)	02	Aperture	40K	4000K	SIL	Silver
		03	Grasp	50K	5000K		
		04	Curve				
		05	Pen				
		06	Still				
		07	Passage				
		08	Crush				
		10	Burrow				

Sample Ordering: **CRE-03-30K-BR**
 Cat. No. | Trim | Color Temp. | Finish

Light Engines and Trims
 Can be purchased & stocked separately to readily offer all combinations of color temperatures, outputs, finishes, & trims

Rev. 2019-01-17

