


FDL



TECHNICAL SPECIFICATIONS:

- ⊞ Construction: Spun aluminum
- ⊞ LED: Seoul DOB (Driver On Board) Technology
- ⊞ Gasket: close cell Neoprene foam gasket
- ⊞ Optics: White translucent acrylic lens
- ⊞ Voltage: 120V AC
- ⊞ Dimmable down to 10% using an approved dimmer
- ⊞ Power factor: 90% +
- ⊞ Suitable for damp locations when gasket is used
- ⊞ Maximum Ambient Temperature: 104°F
- ⊞ ETL-listed
- ⊞ Energy Star-rated

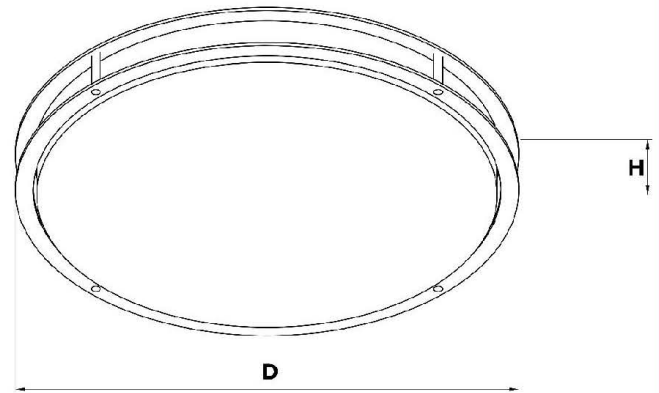

C16

LED FLUSH MOUNT FIXTURES

LED DRUM FIXTURES

CATALOG NO.	SIZE	WATTS	COLOR TEMP	LUMENS	SHAPE
FDL-12-15W-40K	12" Diameter	15W	4000K	1000LM	ROUND H= 3-1/2"
FDL-14-20W-40K	14" Diameter	20W	4000K	1400LM	
FDL-16-25W-40K	16" Diameter	25W	4000K	1800LM	
FDL-18-30W-40K	18" Diameter	30W	4000K	2200LM	

