


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

## DIMENSIONS:

47-7/8"(L) x 13"(W) x 3"(H)

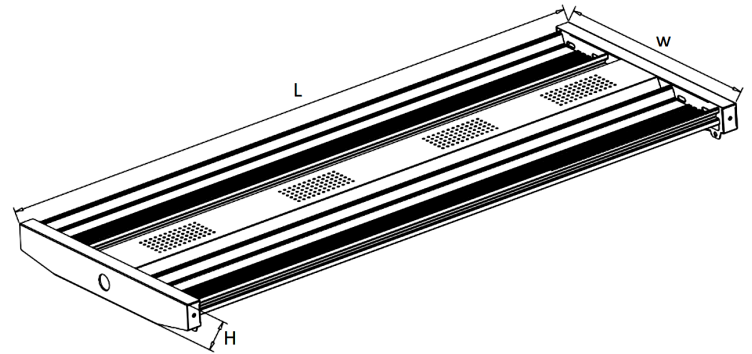

## LLHB4-500W-50K-D

### 4TH GENERATION OF LED LINEAR HIGH BAYS

Ideal for one-for-one replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing warehousing and other large indoor spaces with mounting heights from 10 ft. to 40 ft. Fixture can be Surface mounted also.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC/50~60 Hz
- Wattage: 500W
- Power factor: >0.95
- Efficacy: 125LM/W

### HOUSING SPECIFICATIONS:

- Surge protector
- Extruded aluminum housing
- Individual, pure aluminum heat sinks
- Operating temperature: -4°F ~ 131°F
- Suitable for damp Locations

### CERTIFICATIONS: UL




**WARRANTY:** 5 years

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LLHB4-500W-50K-D	500W	100~277VAC	62500LM	5000K

### OPTIONAL ACCESSORIES:



SCL-GSY10  
SCL-GSY20



LLHB4-RODKIT  
(Fixture Show with  
LLHB4-RODKIT)



LLHB4-SMK  
(Fixture Show with  
LLHB4-SMK)

MODEL	DESCRIPTION
SCL-GSY10	HEAVY-DUTY ADJUSTABLE 10 FT. 1/16" SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS
SCL-GSY20	HEAVY-DUTY ADJUSTABLE 20 FT. 1/16" SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS
LLHB4-RODKIT	Optional Rod Kit, 3-1/4" DIA. X 40" H
LLHB4-SMK	Optional Surface Mounting Kit

### LIGHTING SPECIFICATIONS:

- Dimming: 0~10 Dimmable
- Lens: Polycarbonate Lens
- Total lumens: 62500LM (Per industry standards, Lumens are reported without frosted lens)
- Color temperature: 5000K
- Color rendering index: >80
- Wide Beam angle

