

# LWAX SERIES Outdoor Lighting

LWAX-MD-30W-30K  
LWAX-MD-30W-40K  
LWAX-MD-30W-50K




Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors or another instant on/off controls.

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

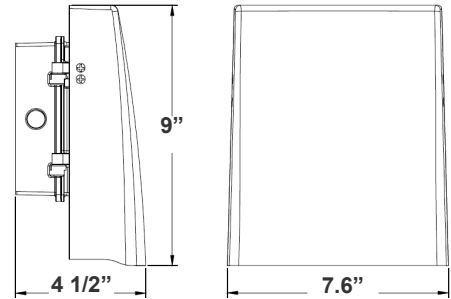

**7 3/5" (W) x 9" (H) x 4 1/2" (D)**

## Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- LED Type/Brand: SMD 3030/ Philips Lumileds LEDs
- Four 1/2" Knockouts: 1 Top, 1 on Each Side, 1 Back
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 30W
- Power Factor: >0.95
- Efficacy: 130 LPW

### Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Light Head Can Be Adjusted From 0° to 90°
- Full Cutoff, Dark Sky Compliant
- Four 1/2" Knockouts: 1 Top, 1 on Each Side, 1 Back
- Operating Temperature: -4°F -104°F
- Wet Location
- 7-Year Warranty
- IP65

### Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- LED Type/Brand: SMD 3030/ Philips Lumileds LEDs
- The Type II Distribution is Used For Wide Walkways, On Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 3900LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam angle: 80° x 100°
- Rated life: 70,000 Hrs

### Applications:


- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas

### Other Models:


- 12W | 1500LM | LWAX-SM-12W-30K
- 12W | 1500LM | LWAX-SM-12W-30K-WH
- 12W | 1500LM | LWAX-SM-12W-40K
- 12W | 1500LM | LWAX-SM-12W-40K-WH
- 12W | 1500LM | LWAX-SM-12W-50K
- 12W | 1500LM | LWAX-SM-12W-50K-WH




## Photometrics: LWAX-MD-30W

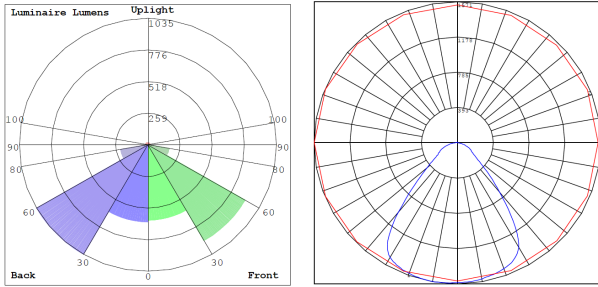


BUD Rating: B2-U2-G1

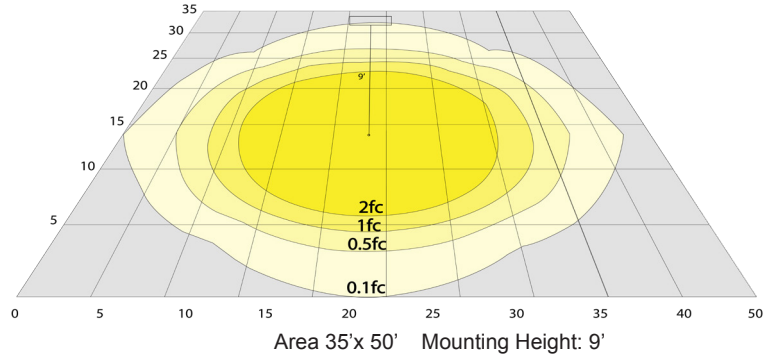

## Other Views:



Side View



Front View



Back View

## Performance Table: LWAX-MD-30W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LWAX-MD-30W-30K	30W	120~277V	3900LM	3000K	B2-U2-G1	130
LWAX-MD-30W-40K	30W	120~277V	3900LM	4000K	B2-U2-G1	130
LWAX-MD-30W-50K	30W	120~277V	3900LM	5000K	B2-U2-G1	130

## Sample Ordering

**Model**      **Size**      **Wattage**      **Color Temp.**  
 -  -  -

30K = 3000K  
 40K = 4000K  
 50K = 5000K

## Accessories:

LWA-SH2 = SHROUD

## Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-EM-FM1INT= INTERNAL EMERGENCY BACKUP BATTERY  
 OPT-SEN-3MRLV-5 = PROGRAMMABLE MICROWAVE BI-LEVEL  
 OPT-CLR-85 = COLOR PAINT  
 OPT-PC-B = BUTTON  
 OPT-TRS-T120 = TAMPER RESISTANT SCREW  
 WEC-8RC = OPTIONAL REMOTE

## ACCESSORIES:



LWA-SH2

## FACTORY-INSTALLED OPTIONS:



OPT-EM-FM1INT



OPT-SEN-3MRLV-5



WEC-8RC



OPT-PC-B

## Example:

- LWAX-MD-30W-50K
- LWAX-MD-30W-50K  
LWA-SH2
- LWAX-MD-30W-50K  
LWA-SH2  
OPT-EM-FM1INT

(FOR LWAX 30W 5000K FIXTURE 120-277V)

(FOR LWAX 30W 5000K FIXTURE 120-277V)  
(SHROUD)

(FOR LWAX 30W 5000K FIXTURE 120-277V)  
(SHROUD)  
(INTERNAL EMERGENCY BACKUP BATTERY)

