




Bottom LED array ensures seamless coverage in proximity of the fixture

### DIMENSIONS:

14-1/4"(W) x 9-1/4"(H) x 7-3/8"(D)

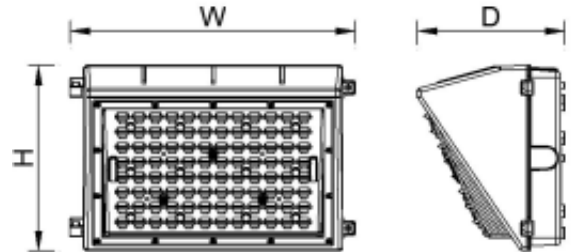

## WML2-80W-50K-HL WML2-80W-40K-HL WML2-80W-30K-HL

### LED NON-CUTOFF 2<sup>nd</sup> GENERATION WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

#### ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277 VAC /60 Hz
- Wattage: 80 W
- Power factor: 0.95
- Efficacy: 126 LM/W

#### HOUSING SPECIFICATIONS:


- Die-cast aluminum housing
- Powder Coat finish (Dark Bronze)
- Same footprint as traditional HID wall packs
- Includes mounting hardware
- Four 1/2" hubs: 1 top, 1 on each side, 1 rear.
- Operating temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

#### CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML2-80W-50K-HL	80W	120~277 VAC	10100 LM	5000K
WML2-80W-40K-HL	80W	120~277 VAC	10100 LM	4000K
WML2-80W-30K-HL	80W	120~277 VAC	10100 LM	3000K

#### PHOTOMETRY:

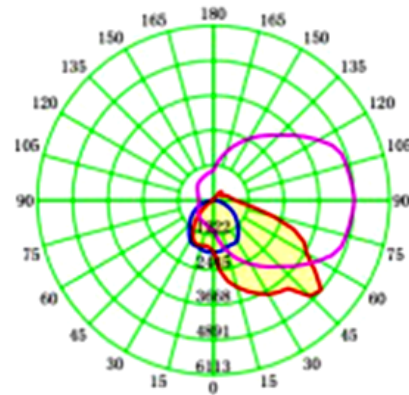

#### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: Polycarbonate Optic Lens
- LED Chip: Philips Lumileds LEDs
- Total lumens: 10100 LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >80

#### WARRANTY: 7 years

