

E-PRO 3 SWIVEL



The smallest member of the E-Pro downlight family includes a 3" non-IC remodel housing with a built-in driver and LED module with an integrated swivel trim.

Performance

- Choose from three finishes - all EP3S fixtures include non-IC remodel housing
- Dimmable with most standard incandescent (triac) and low voltage electronic (ELV) dimmers for 5-100% light control
- Eliminate up to 14 lamps replacements - long life SMD LEDs last up to 35,000 hours, compared to incandescent lamps with a rated life of 2,500 hours
- Energy Star compliant and c/ETL/us Listed for damp locations

Construction

- Aluminum non-IC remodel housing, attached junction box with eight 1/2" knockouts houses remote driver
- Aluminum barrel with three spring steel ceiling clips
- Aluminum trim ring with durable powder coat finish
- Polycarbonate lens diffuses light

Installation



- Cut-out template included (3-3/8" hole size)
- Requires 5" clearance in ceiling



Photometrics

EP3S-E26-30-WH

Luminous flux	340Lm
Maximum intensity	195 cd
Input wattage	6W
Lumens per watt	56 LPW
Beam angle	77°

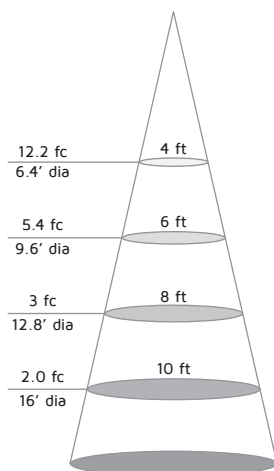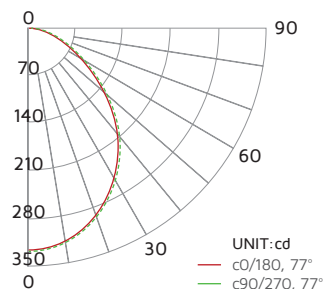

Specifications

Series	EP3S
Input voltage	120V AC, 60Hz
Color temperature	3000K
CRI	80+
Wattage	6W
Lumens	306Lm / 323Lm / 340Lm
Beam angle	77°
Dimming	PWM dimming**
Housing	Aluminum
Lens	Frosted polycarbonate
Rating	c/ETL/us Listed, damp locations
Dimensions	3-15/16"D x 4-7/8"H x 11-1/4"L
Mounting	Recessed, non-IC remodel
LED type	14 x SMD 2323 LEDs
Rated life	35,000 hrs

EP3S Downlight



EP3S-RE-30-DB

EP3S - Dark Bronze (3000K)
6W / 306Lm



EP3S-RE-30-BS

EP3S - Brushed Steel (3000K)
6W / 323Lm



EP3S-RE-30-WH

EP3S - White (3000K)
6W / 340Lm