

# RELYENCE DISTRIBUTOR PROGRAM



## RE-GEO-FM-992XX

### LED FIXTURES


4" AND 6" DISK LIGHT – J-BOX OR RETROFIT MOUNTING

Type	
Project	
Catalog No.	






**DIMENSIONS: 5-3/8" Ø x 1-1/2" H / 7-3/8" Ø x 1-1/2" H**

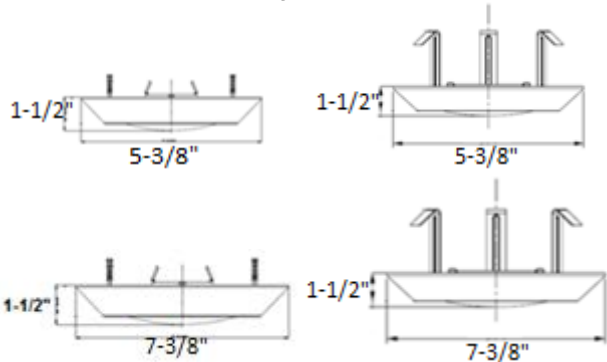Outlet box mounting      Retrofit Mounting



### SPECIFICATIONS

<b>Model</b>	RE-GEO-FM-992XX	
<b>Description</b>	Disk Light – 4" and 6"	
<b>Input Voltage</b>	120 VAC	
<b>Size</b>	4"	6"
<b>Wattage</b>	8W	10W
<b>Lumens</b>	650 lm	750 lm
<b>Efficacy</b>	81 lm/W	75 lm/W
<b>CCT/CRI</b>	2700K@90CRI	
	3000K@80CRI	
	3500K@80CRI	
<b>Power Factor</b>	>0.95	
<b>Operating Temperature</b>	-4 to +113 °F	
<b>Dimming</b>	Triac Dimming and CFL/LED	
<b>Dimensions</b>	See Diagram	
<b>Environment</b>	Indoor – Dry / Damp	
	  	
<b>Warranty</b>	5 Years – see published warranty terms for detailed information.	

▼ Exceeding the operating temperature values may damage the LEDs by reducing the lifespan, lumen output, and/or adversely impact color consistency. Improper thermal management may lead to premature product failure and void the warranty.

### DESCRIPTION

JESCO's RELYENCE Series 4" and 6" LED Disk light is available in recessed configuration with a multi-groove reflector providing an easy and cost effective solution to the traditional flush mounted ceiling light. Easily mounts on to standard junction boxes or retrofits into 4" and 6" recessed housings with supplied mounting kit. These fixtures are designed for damp or dry locations and are dimmable down to 10% with Triac or CFL/LED dimmers.

### FEATURES

- Up to 750 lm from 10 W
- CCT - 2700K, 3000K or 3500K ♦
- CRI >80 & 90 ♦
- Power Factor >0.95
- Dimmable down to 10% with most Triac or CFL/LED dimmers
- ADA compliant
- Beam Angle - 110°
- Damp Location Listed
- Eco-Friendly – No mercury or hazardous materials
- J-Box or retrofit mounting

♦ Refer to ordering info



www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6<sup>th</sup> Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955

Specifications subject to change without notice.

# RELYENCE DISTRIBUTOR PROGRAM



**RE-GEO-FM-992XX**

**LED FIXTURES**

4" AND 6" DISK LIGHT – J-BOX OR RETROFIT MOUNTING


Type	
Project	
Catalog No.	

## ORDERING INFORMATION

MODEL	STYLE	CCT/CRI	FINISH
RE-GEO-FM-992	04- 5-7/8" 06- 7-3/8"	2790-2700CCT/90CRI 3080-3000CCT/80CRI 3580-3500CCT/80CRI	WH-White


Example: RE-GEO-FM-99204-2790-WH

## SUPPLIED WITH:

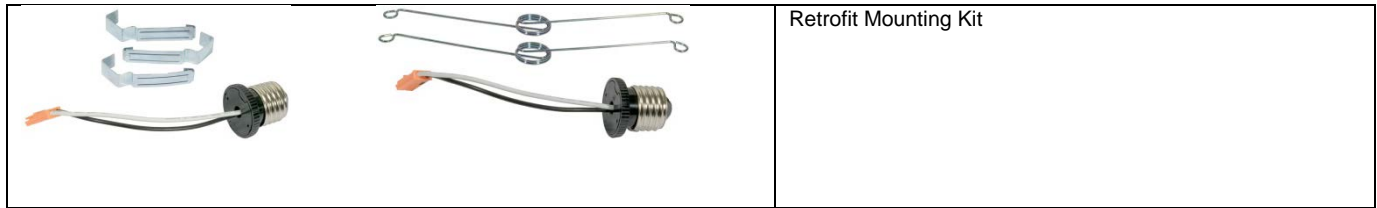

## PHOTOMETRIC DATA

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

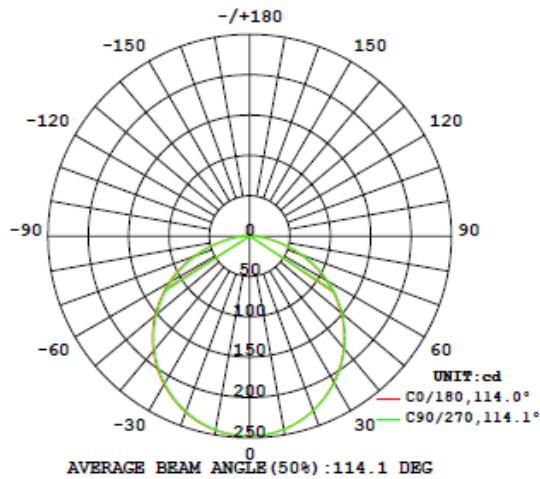

**For 99204"**



www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6<sup>th</sup> Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955

Specifications subject to change without notice.

# RELYENCE DISTRIBUTOR PROGRAM



**RE-GEO-FM-992XX**

**LED FIXTURES**


4" AND 6" DISK LIGHT – J-BOX OR RETROFIT MOUNTING

Type

Project

Catalog No.

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

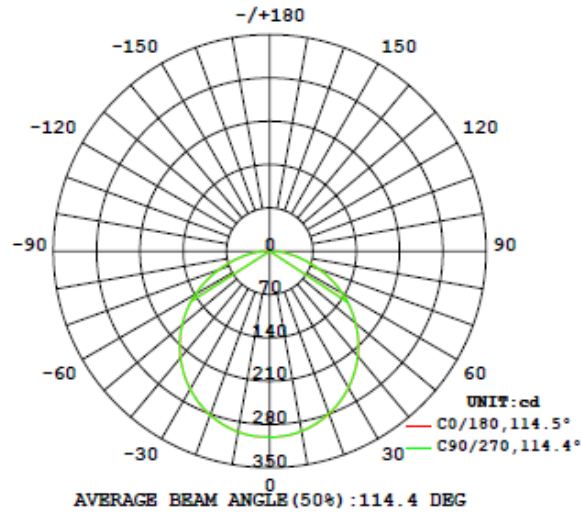

**For 99206"**